


30W Triple Output Switching Power Supply

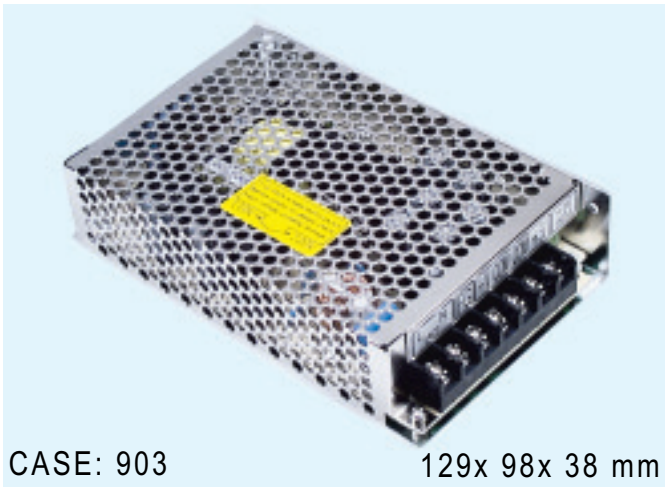

- AC input range selectable by switch
- Protections: Short circuit / Overload
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

AC input voltage range 85~132VAC/ 170~264VAC selectable by switch
 AC inrush current Cold start, 18A at 115VAC, 36A at 230VAC
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~150% fold back current limiting,
 auto-recovery
 Setup, rise, hold up time 200ms, 100ms, 30ms at full load and 230VAC
 Withstand voltage I/P-O/P:1.5KVAC, I/P-FG:1.5KVAC, 1minute
 Working temperature 0~50°C@100%, -10°C@80%, 60°C@60% load
 Safety standards Design refer to UL1012
 EMC standards Design refer to FCC part 15 J
 Connection 7P/ 9.5mm pitch terminal block
 Packing 0.42kg ; 30pcs / 13.6kg / 0.86CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.	Max.
10261	T-30A	5V, 0.5~3.0A	±2%	50mV	70%	30W
		12V, 0.1~1.0A	+2%,-6%	100mV		
		-5V, 0.1~0.5A	+2%,-10%	50mV		
10262	T-30B	5V, 0.5~3.0A	±2%	50mV	72%	33W
		12V, 0.1~1.0A	+2%,-6%	100mV		
		-12V, 0.1~0.5A	±6%	100mV		